

# GLOBE SELECTION GUIDE




Use these 5 easy steps to select the correct globe for your needs


## 1) Select Style (images shown above)

Smooth Sphere, Prismatic Sphere, Streetlamp, or Cylinder

## 2) Determine Globe Size by measuring spheres from side to side rather than from bottom to top - if applicable.

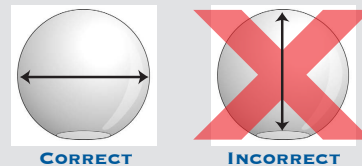

## 3) Select mounting method - which type and size of neck you need or want for your application?

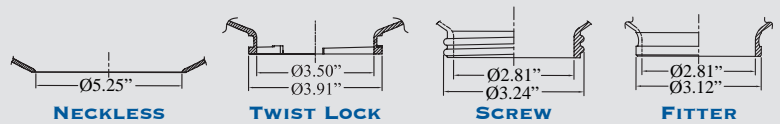

## 4) Choose the material you need based on performance characteristics.

	ACRYLIC (PLEXIGLAS)	POLYCARBONATE (LEXAN)	POLYETHYLENE
<i>Advantages:</i>	Resistant to weathering & aging . Max. working temp. approx. 90 C	High impact resistance Max. working temp. approx. 125 C	High impact resistance Max. working temp. approx. 60 C
<i>Disadvantages:</i>	Break upon high impact	Will yellow with UV over time	Will yellow with UV over time

## 5) Determine Color by choosing from one of the colors on the right.

- Translucent White
  - Clear
  - Prismatic
  - Smoke (blue tint)
  - Bronze (brown tint)
- see Web site for color examples

Contact our Sales Department at 800.304.6463 or visit us at [www.plasticglobes.com](http://www.plasticglobes.com) for more information.